



CRANE DATA	
CAPACITY, LIVE LOAD	4000 LBS.
HOIST SPEED	23/8 F.P.M. 2 SPEED
TROLLEY SPEED	6/25 F.P.M. 2-SPEED
BRIDGE SPEED	7.5/75 F.P.M. 2-SPEED
ROTATION	2 RPM VARIABLE
CMAA CLASS	C, INDOOR
POWER SUPPLY	460-3-60
CONTROL ENCLOSURE	NEMA 12
RUNWAY ELECTRIFICATION	
PAINT	SPC YELLOW G-1142
FORK DIMENSIONS	4" WD. x 1 1/2" THK. x 30" LG.
RUNWAY RAIL LENGTH	
MAST INDICATOR	YES

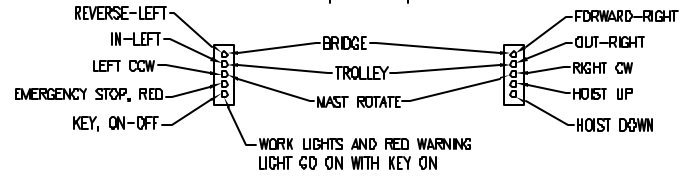

VIEW "A-A"

- NOTES:
1. STANDARD SPAN UP TO 28'-0"; OVER 28'-0", CONSULT FACTORY.
  2. STANDARD RACK HT. UP TO 16'-0"; OVER 16'-0", CONSULT FACTORY.
  3. STANDARD FORK LENGTH IS 30", 36", 42", AND 48"; OVER 48", CONSULT FACTORY.
  4. REFER TO SPECIFICATION SHEET FOR ADDITIONAL INFORMATION.



**AMERICAN CRANE  
& EQUIPMENT CORPORATION**  
DOUGLASSVILLE, PA. 19518 U.S.A.  
PHONE: 610-385-6061  
FAX: 610-385-3191

4K MOBILESTACK  
(WITH ELECTRIC CHAIN HOIST)

2 TON CAPACITY

PRODUCT INFORMATION

DWG. NO:  
A-20418-500

DATE: 12/10/02 REVISION: 0